

SIDE MOUNT RESCUE PUMPER MODEL AFT1001

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
- Rear axle: 27,000 lbs.
- 184" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display





PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Side mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (1) 2.5" Rear Discharge
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Extruded aluminum welded body
- Enhanced extended rescue pumper body
- ROM / Amdor roll-up or hinged pan doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- Compartment top storage for 2 (10') hard suction
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



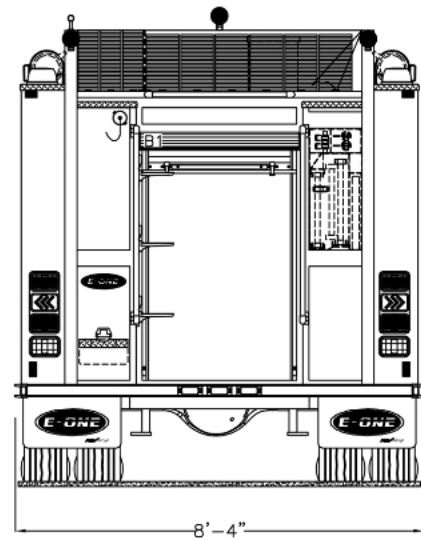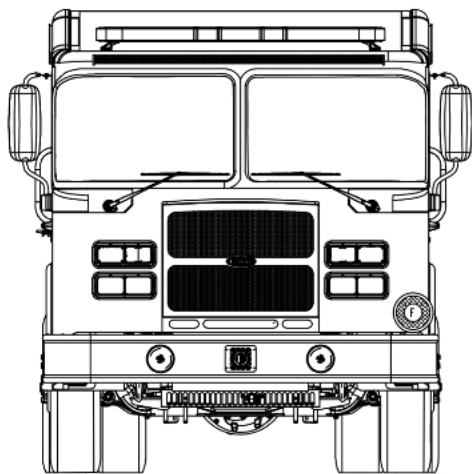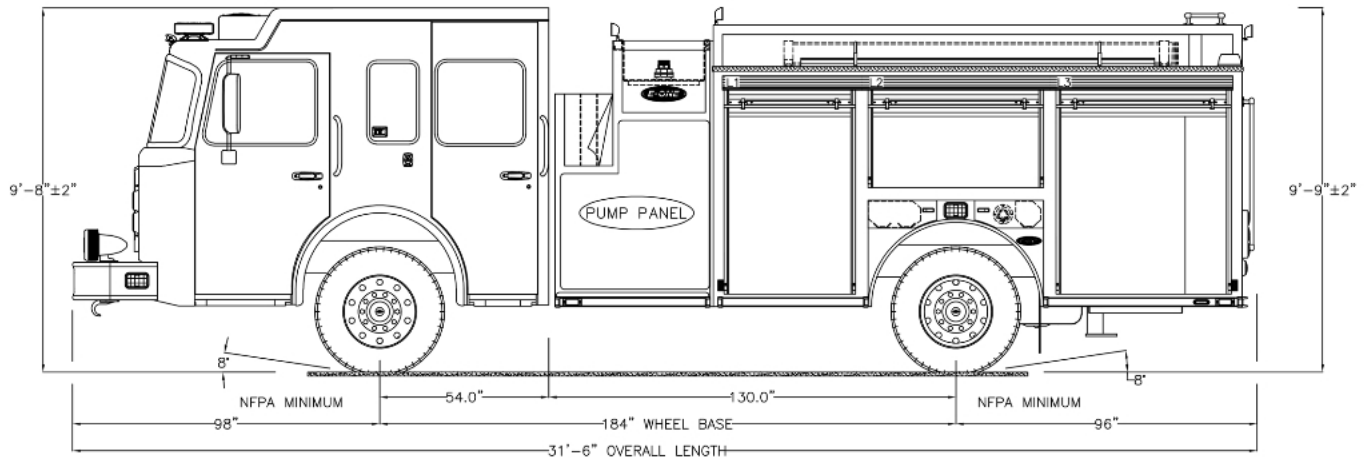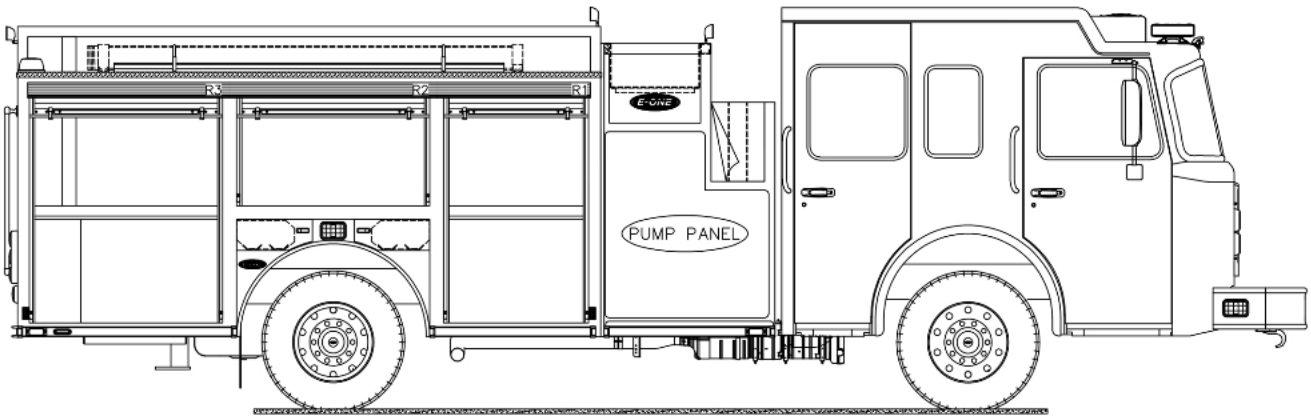

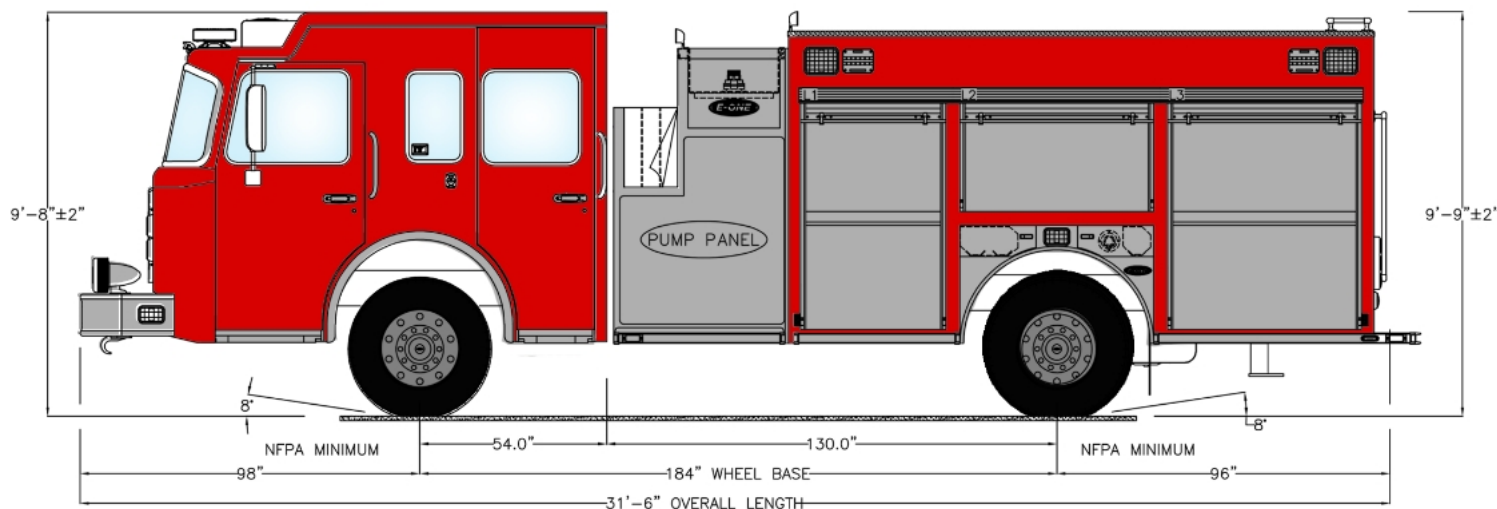

SIDE MOUNT PUMPER MODEL AFT1002

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs. Rear axle: 27,000 lbs.
- 184" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display





PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Side mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (1) 2.5" Rear Discharge
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Extruded aluminum welded body
- Flatback style pumper body
- ROM / Amdor roll-up or hinged pan door
- Wheel well storage for (7) SCBA bottles
- Thru tank storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- Thru tank storage for 2 (10') hard suction
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



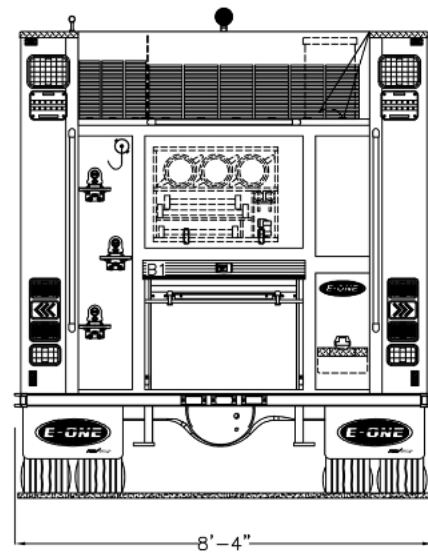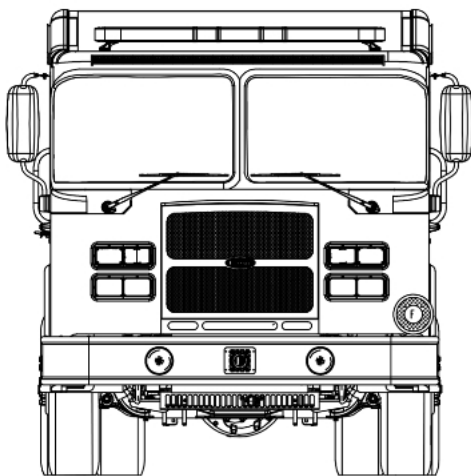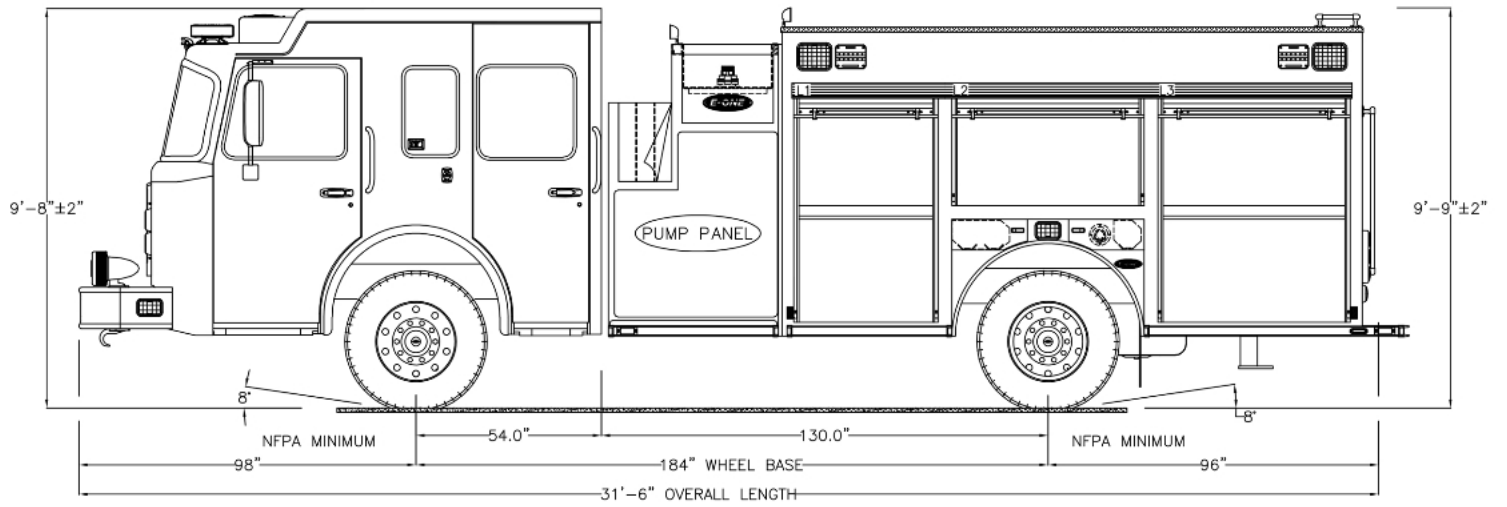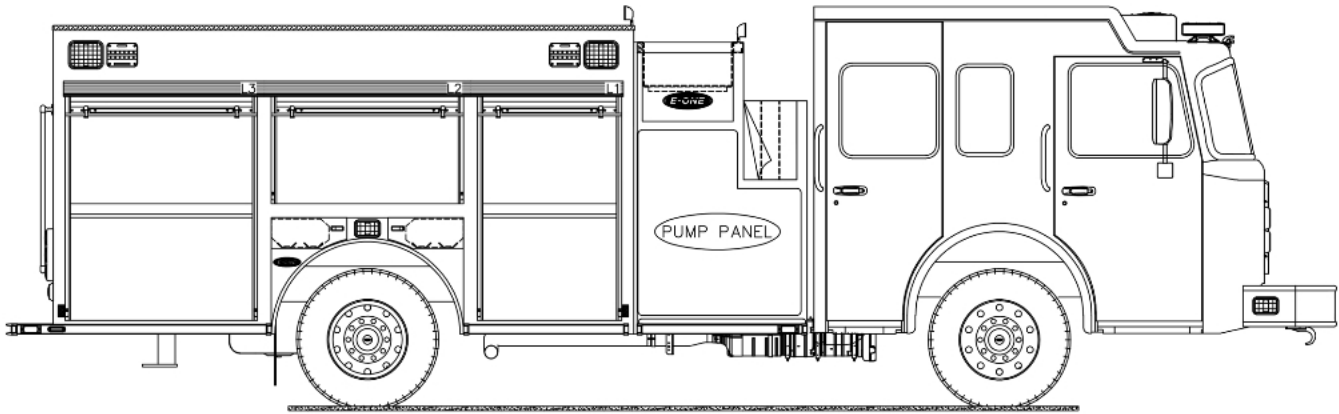

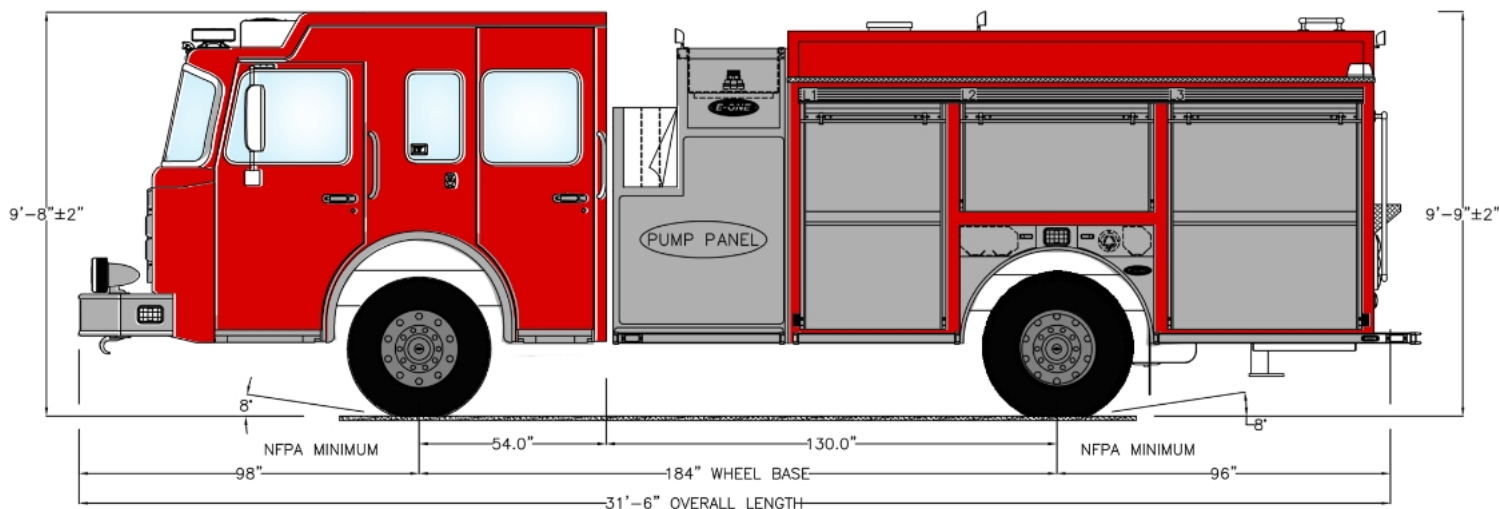

SIDE MOUNT LOW HOSEBED PUMPER MODEL AFT1003

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
- Rear axle: 27,000 lbs.
- 184" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display





PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Side mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 750 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (1) 2.5" Rear Discharge
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1

BODY

- Extruded aluminum welded body
- Low hosebed pumper body
- ROM / Amdor roll-up or hinged panel doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- RH Enclosed storage for 2 (10') hard suction hoses
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



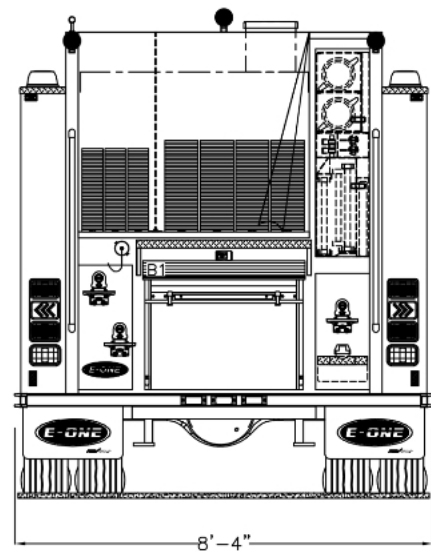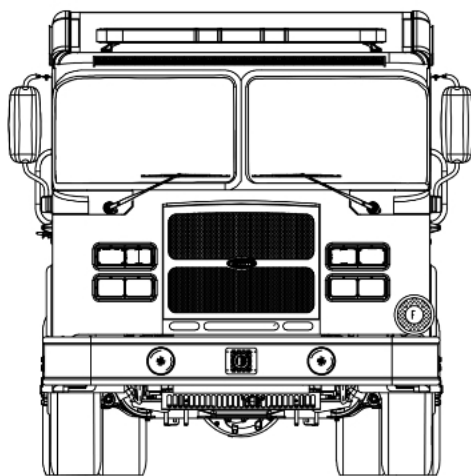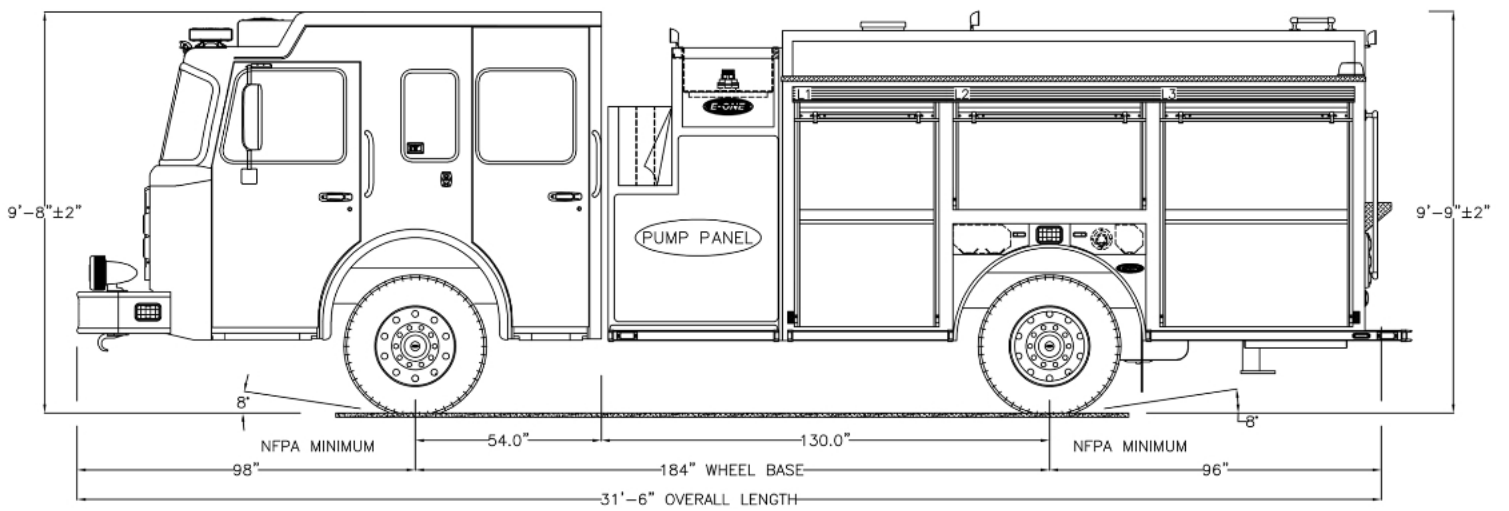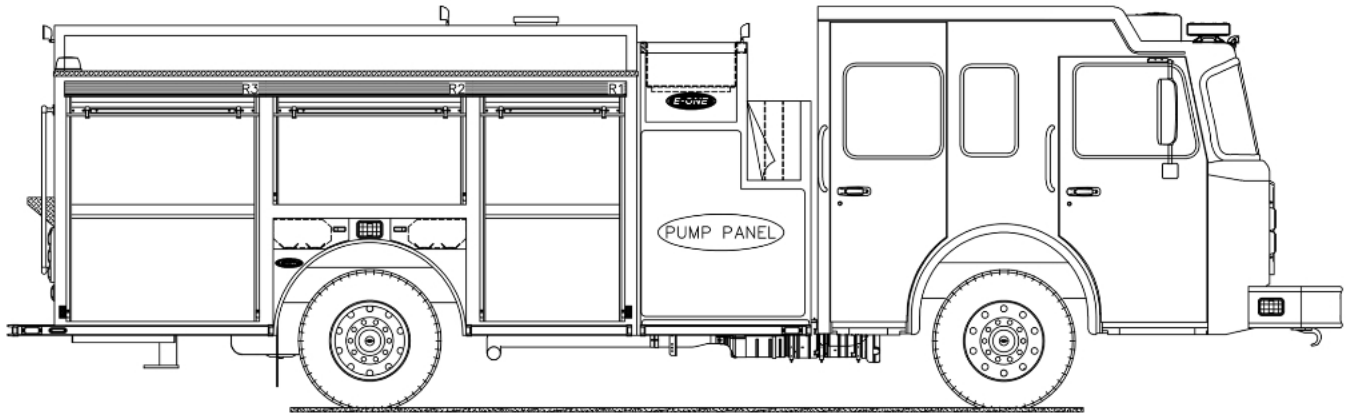

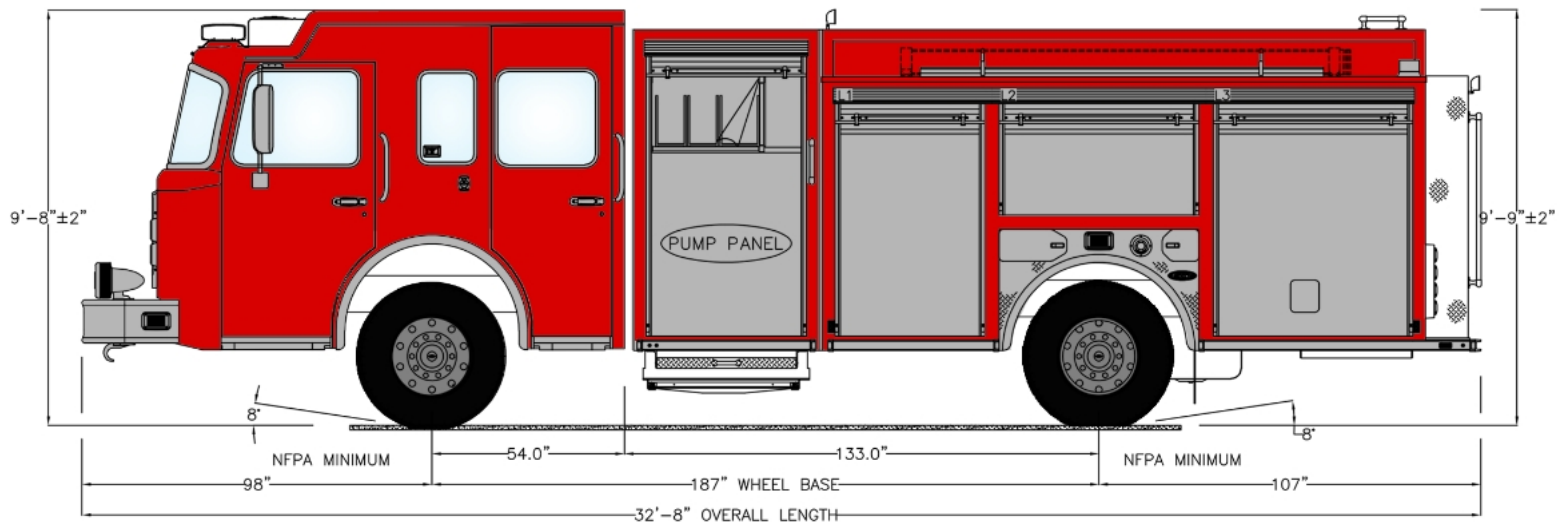

ENCLOSED SIDE MOUNT RESCUE PUMPER MODEL AFT1004

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
- Rear axle: 27,000 lbs.
- 187" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen / Akron scene lights
- Rear camera with in cab display





PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Enclosed side mount pump module
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (2) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (2) 2.5" Rear Discharges
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake

BODY

- Extruded aluminum welded body
- Beavertail style rescue pumper body
- ROM or Amdor roll-up doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- Compartment top storage for 2 (10') hard suction
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen / Akron scene lights



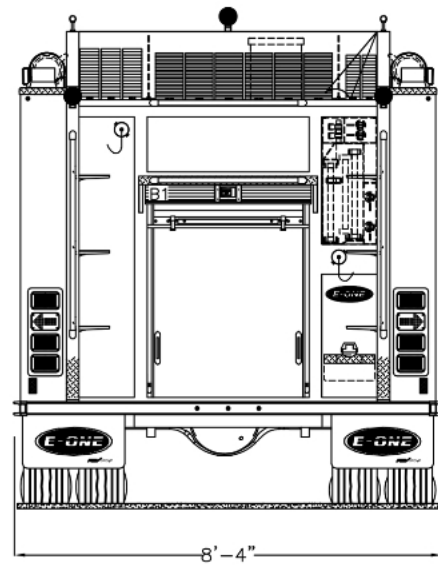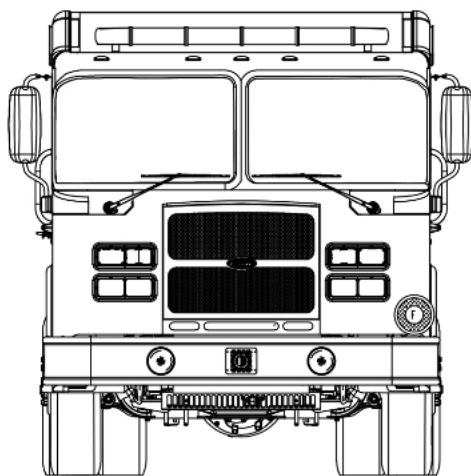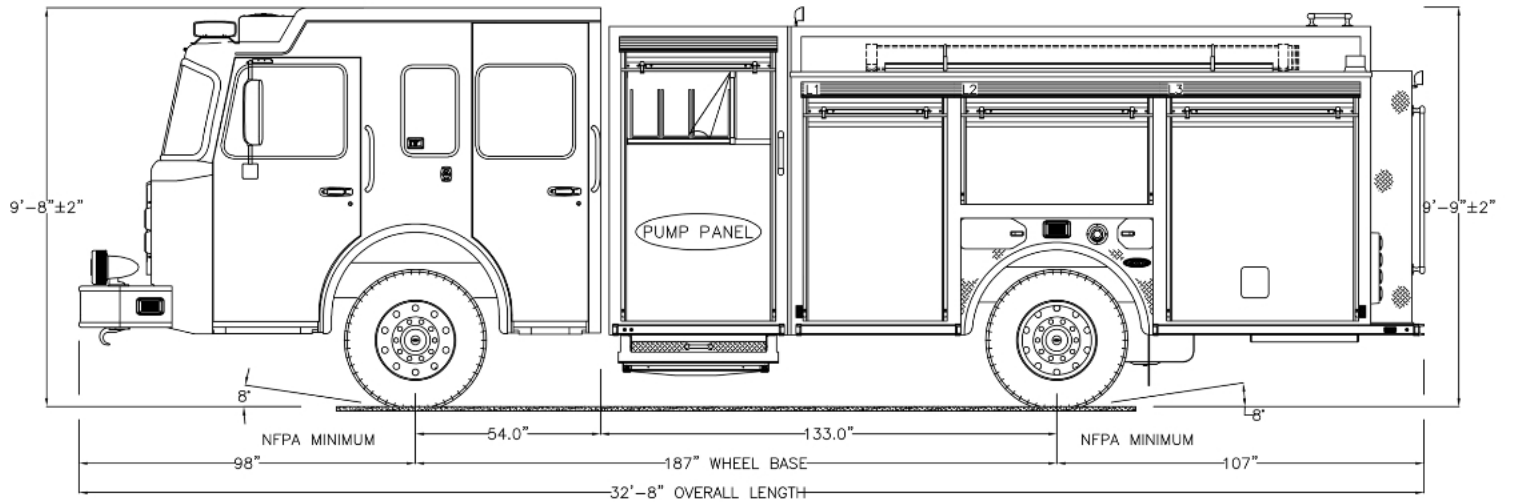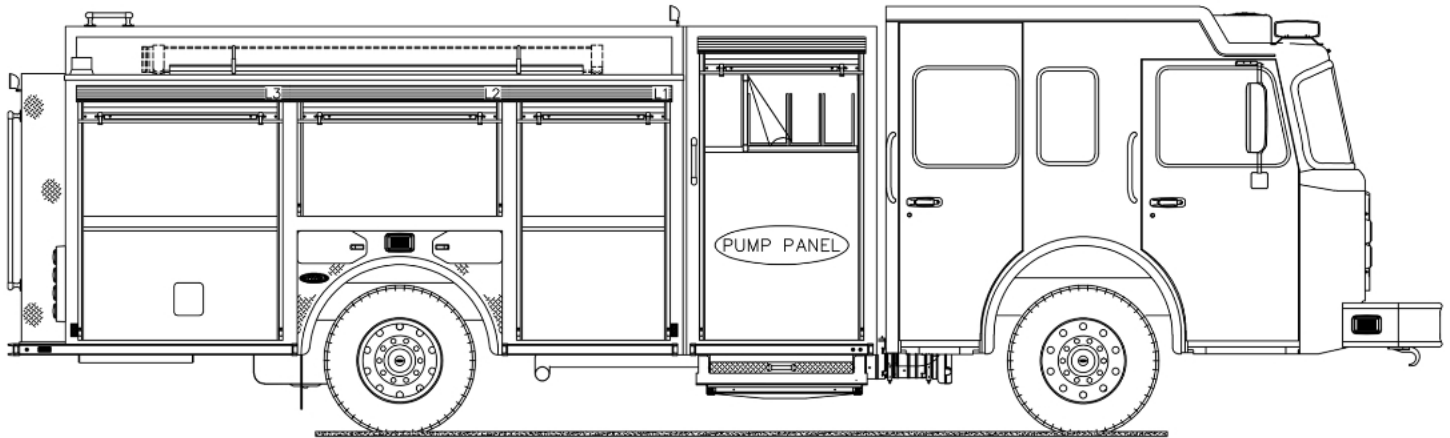

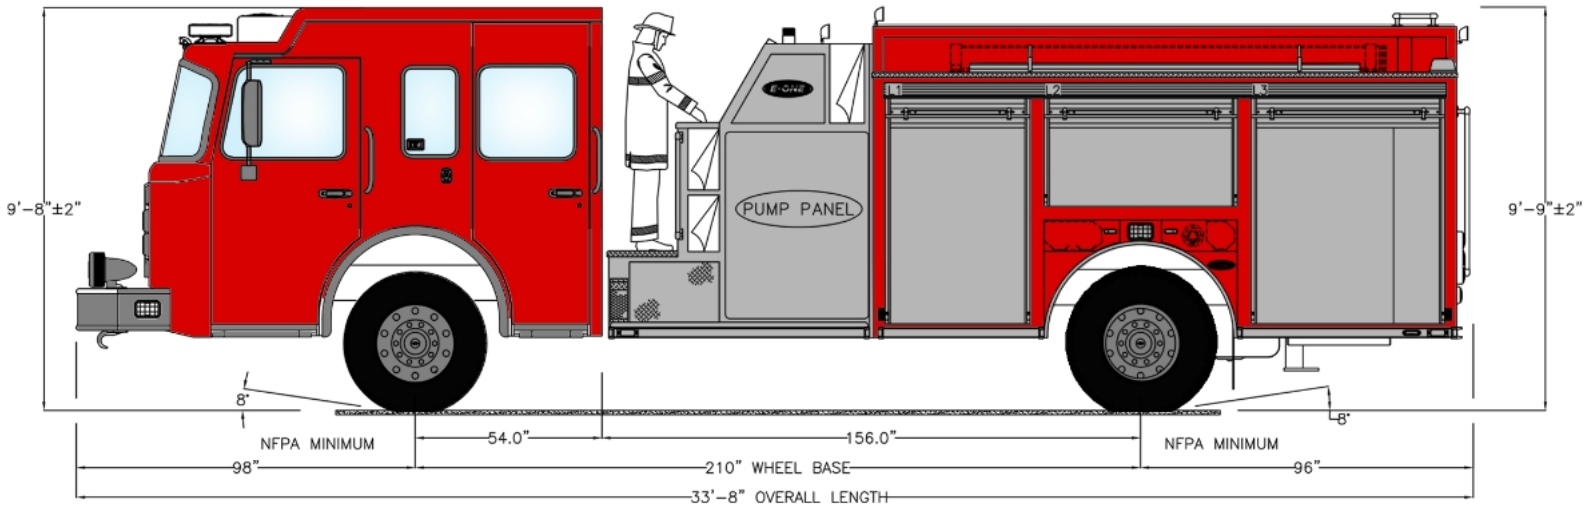

TOP MOUNT RESCUE PUMPER MODEL AFT1005

CHASSIS

- 54" MFD cab with 10" raised roof
Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
Rear axle: 27,000 lbs.
- 210" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display





PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Top mount pump module
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Speedlay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (1) 2.5" Rear Discharge
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Extruded aluminum welded body
- Enhanced extended rescue pumper body
- ROM / Amdor roll-up or hinged pan doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- Compartment top storage for 2 (10') hard suction
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



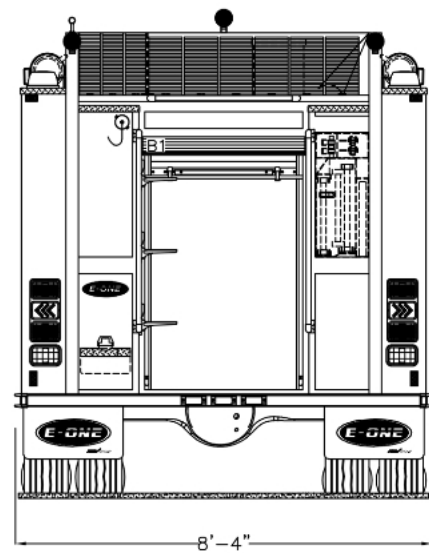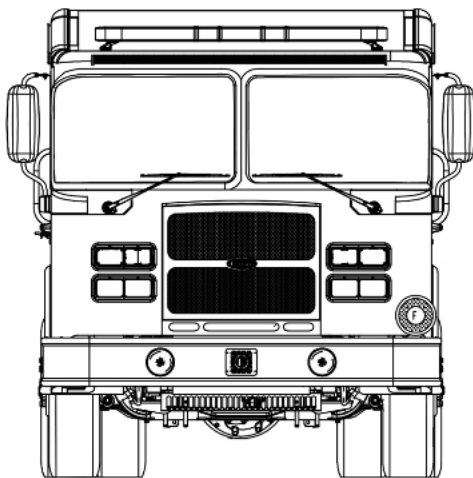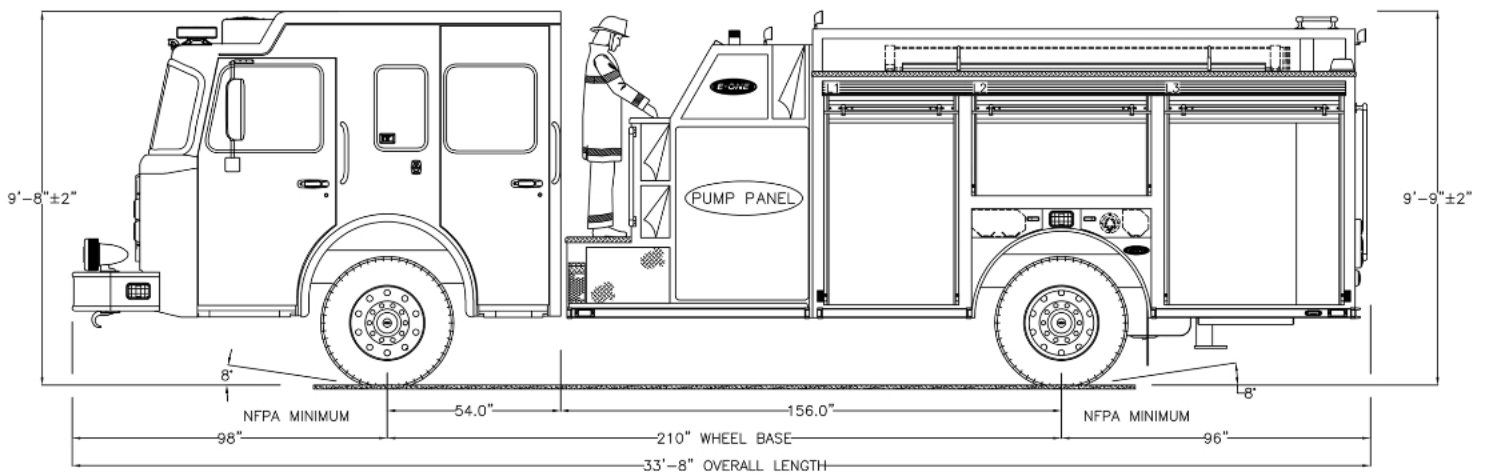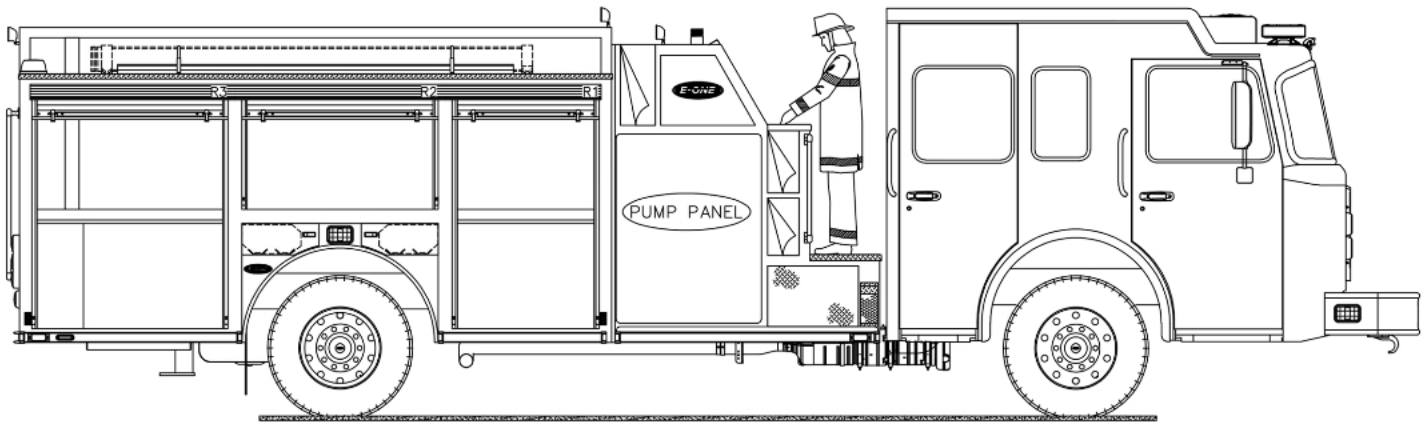

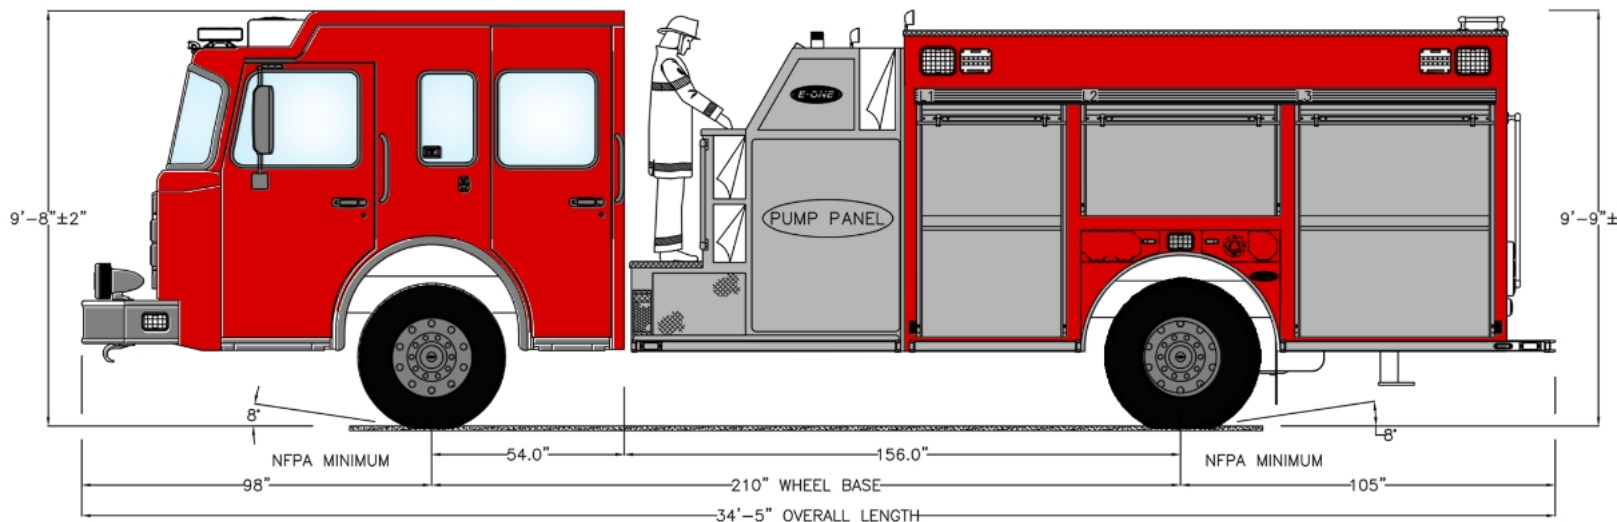

TOP MOUNT PUMPER MODEL AFT1006

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 of 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
- Rear axle: 27,000 lbs.
- 210" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display





PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Top mount pump module
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Speedlay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (1) 2.5" Rear Discharge
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Extruded aluminum welded body
- Flatback style pumper body
- ROM / Amdor roll-up or hinged pan doors
- Wheel well storage for (7) SCBA bottles
- Thru tank storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- Thru tank storage for 2 (10') hard suction
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



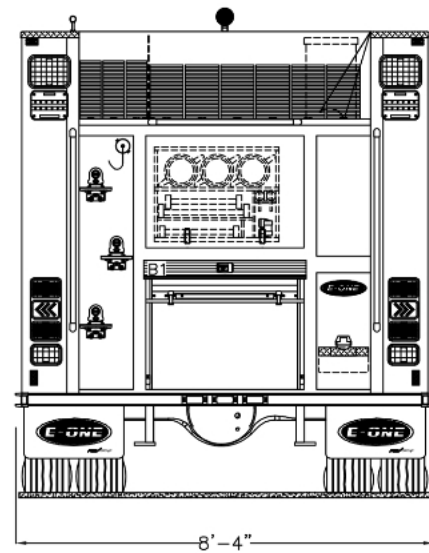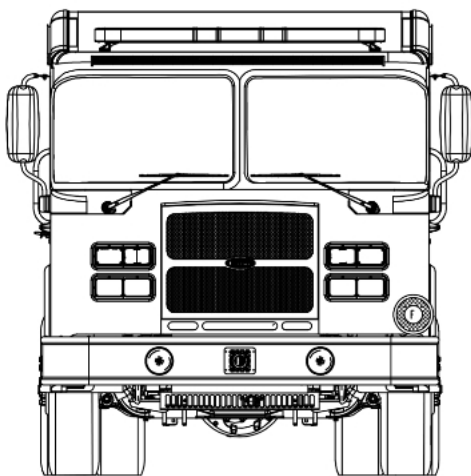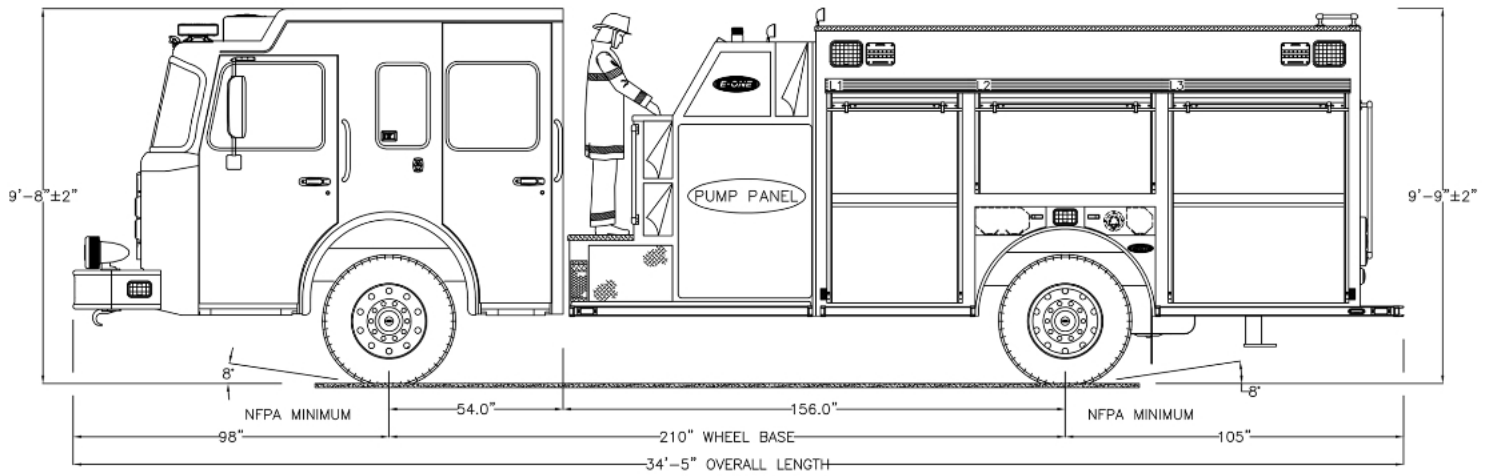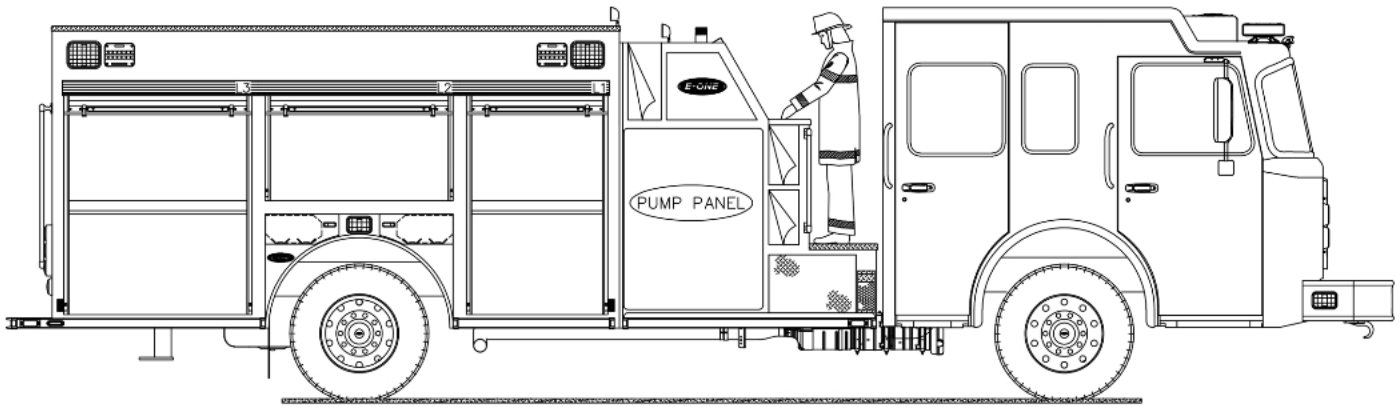

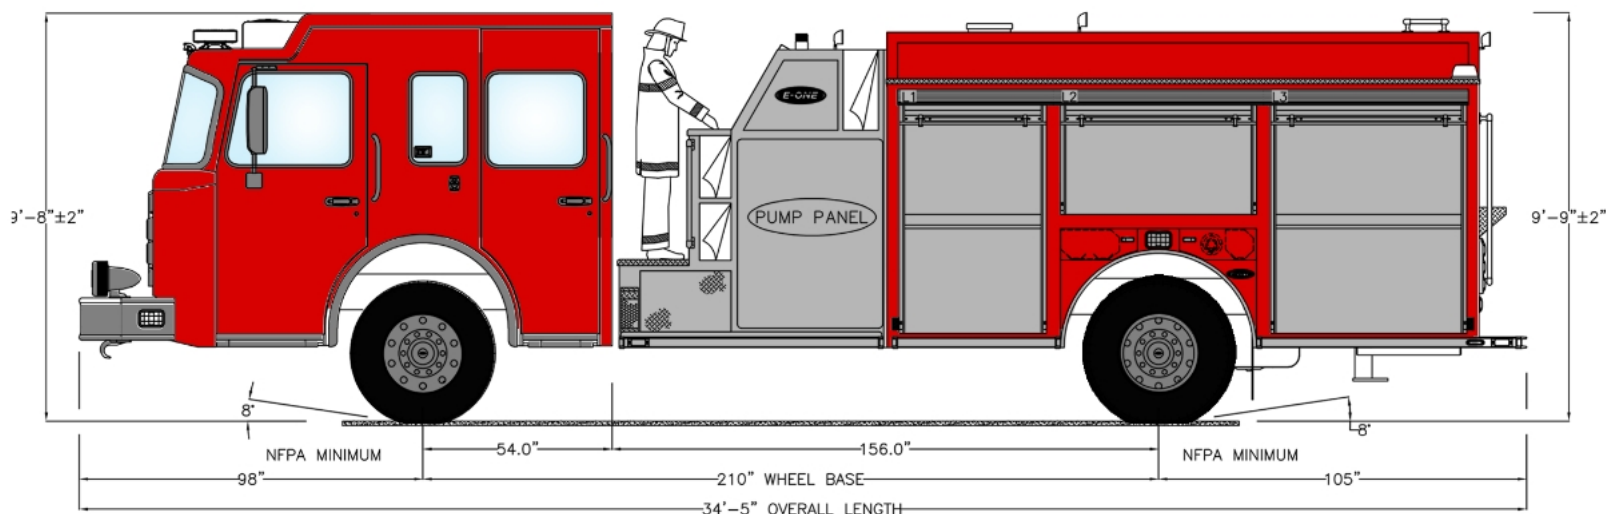

TOP MOUNT LOW HOSEBED PUMPER MODEL AFT1007

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
- Rear axle: 27,000 lbs.
- 210" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display




PUMP AND PLUMBING

- Hale QMAX 1500 gpm pump
- Top mount pump module
- Class 1 TPG pressure governor
- 750 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Speedlay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (1) 2.5" Rear Discharge
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1


BODY


- Extruded aluminum welded body
- Low hosebed pumper body
- ROM / AMDOR roll-up or hinged pan doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- RH Enclosed storage for 2 (10') hard suction hoses
- Whelen or Federal LED warning lights
- Whelen or Federal traffic advisor
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



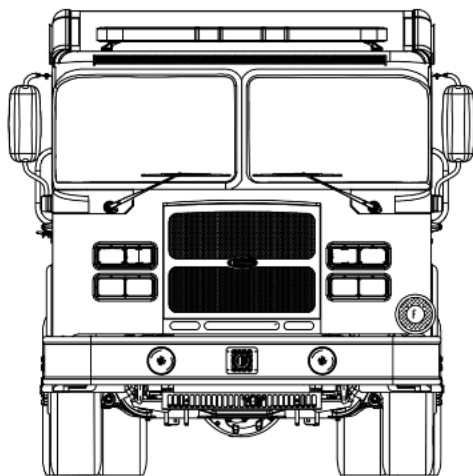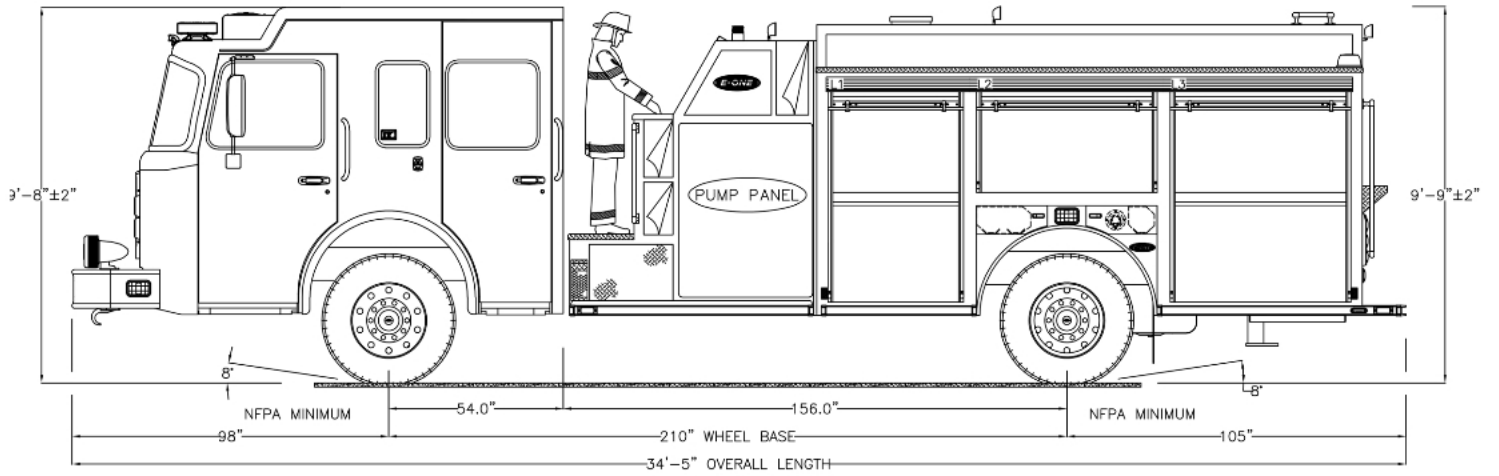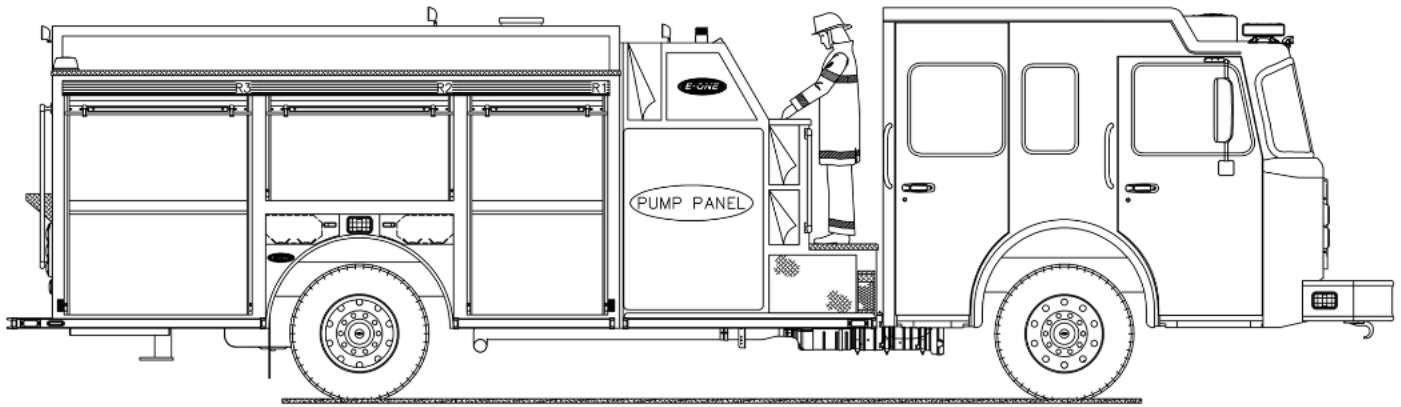

29

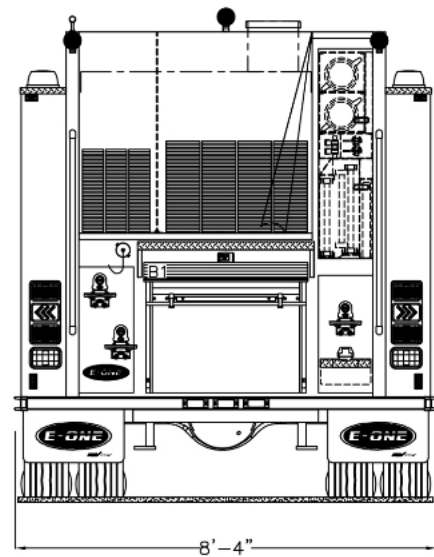

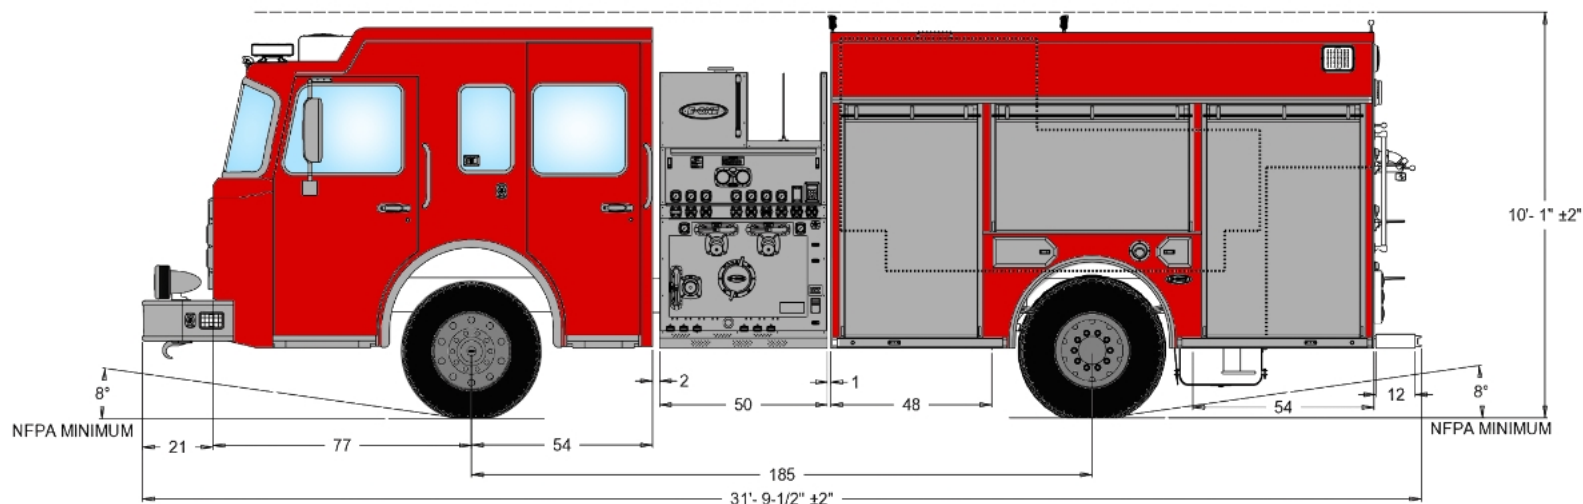

SIDE MOUNT RESCUE PUMPER MODEL AFT5001

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Upto 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs
- Rear axle: 27,000 lbs.
- 185" Wheelbase
- Galvanized frame rails
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display






PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Side mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (2) 2.5" Rear Discharges
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Stainless steel body
- Fiberglass Reinforced Panel (FRP) paint process
- ROM roll-up doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- RH Enclosed storage for 2 (10') hard suction hoses
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



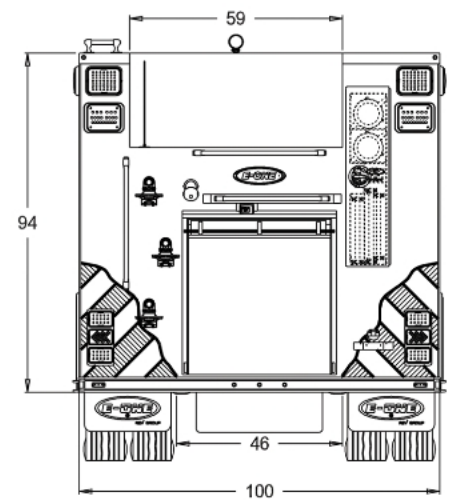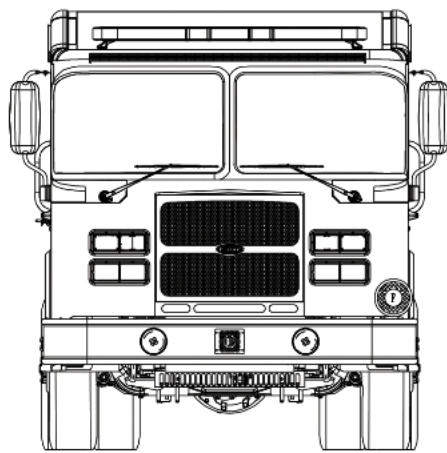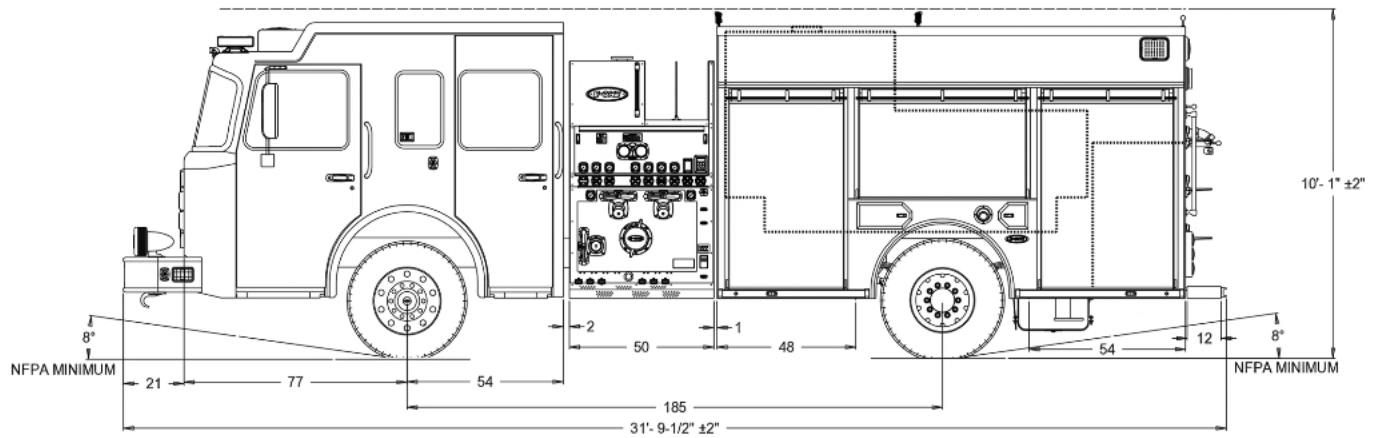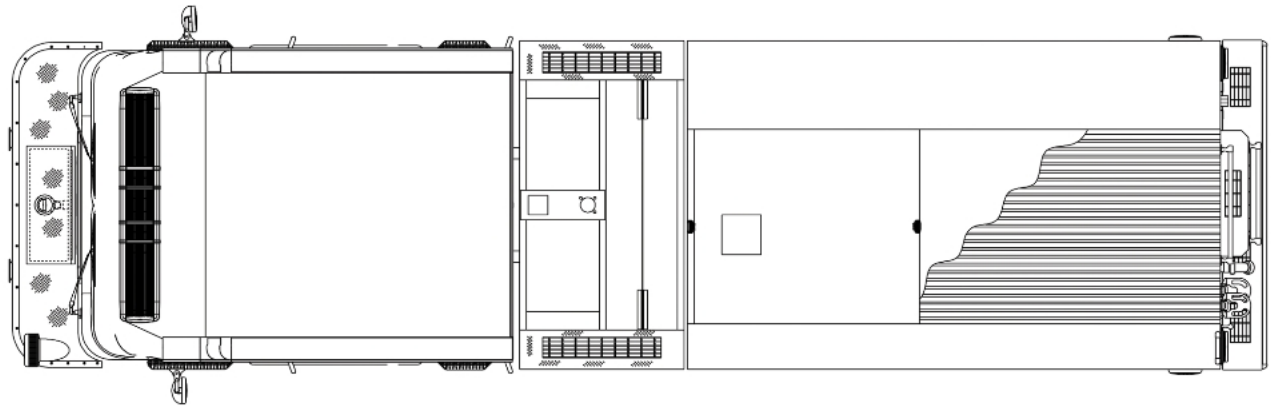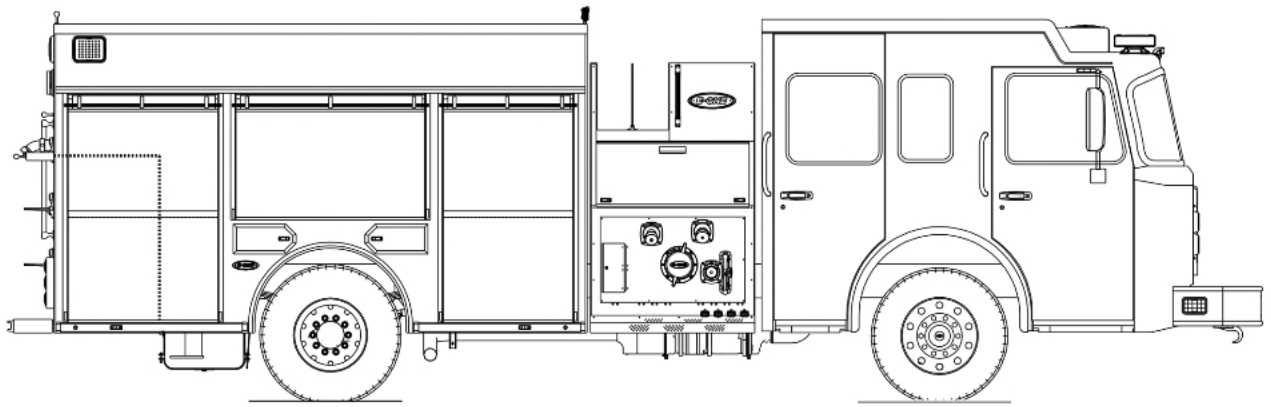

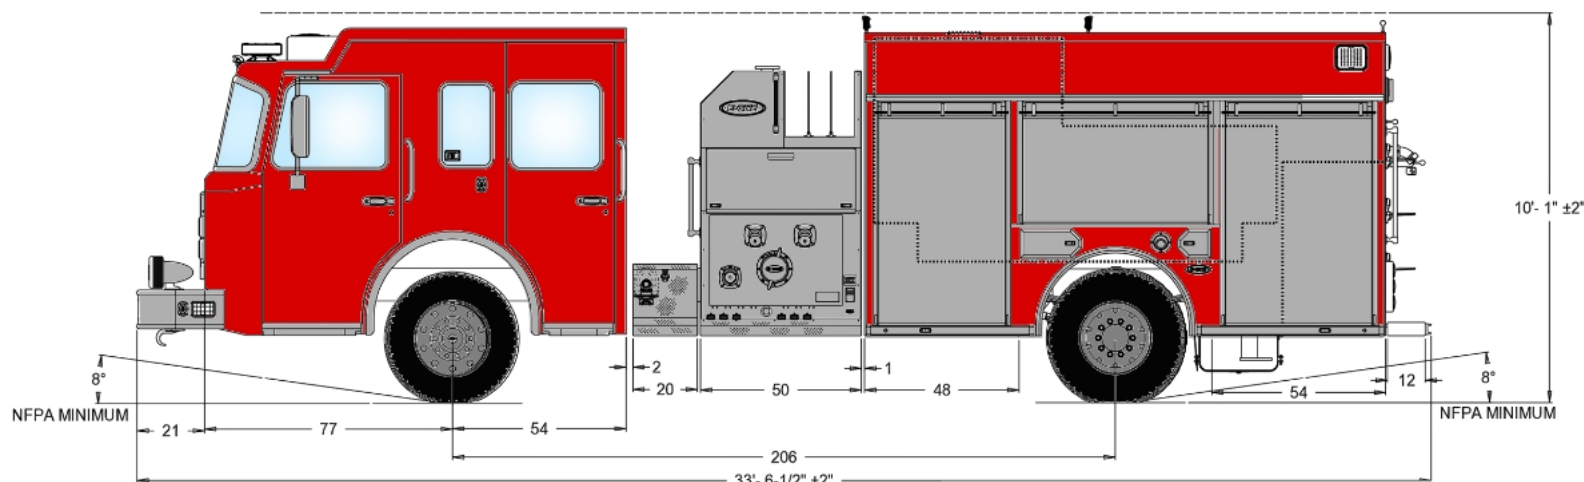

TOP MOUNT RESCUE PUMPER MODEL AFT5002

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
- Rear axle: 27,000 lbs.
- 206" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display






PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Top mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 1000 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (2) 2.5" Rear Discharges
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Stainless steel body
- Fiberglass Reinforced Panel (FRP) paint process
- ROM roll-up doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- RH Enclosed storage for 2 (10') hard suction hoses
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



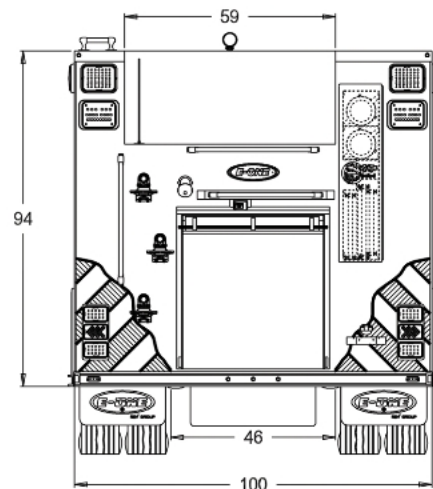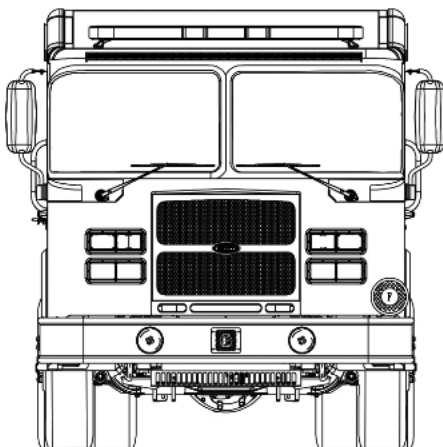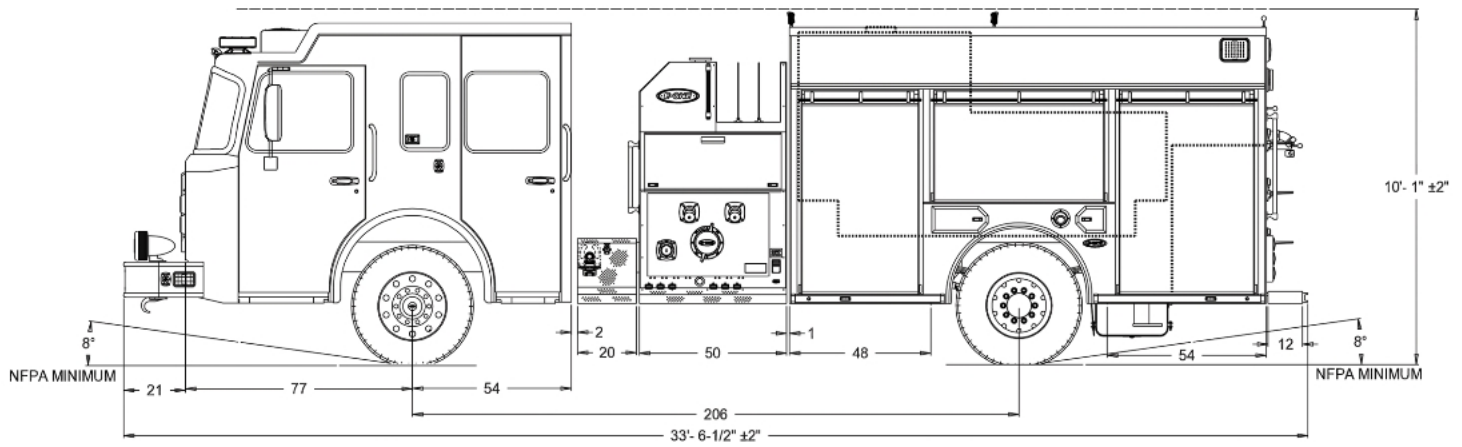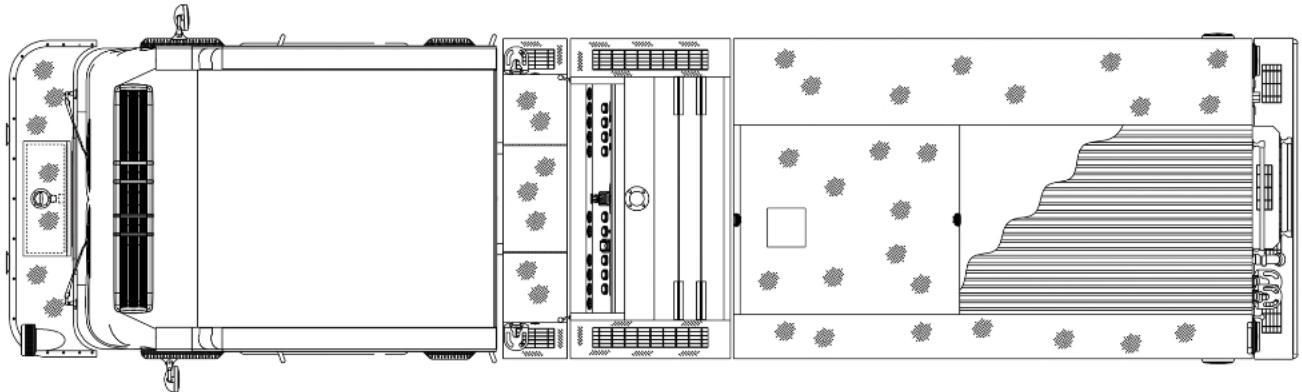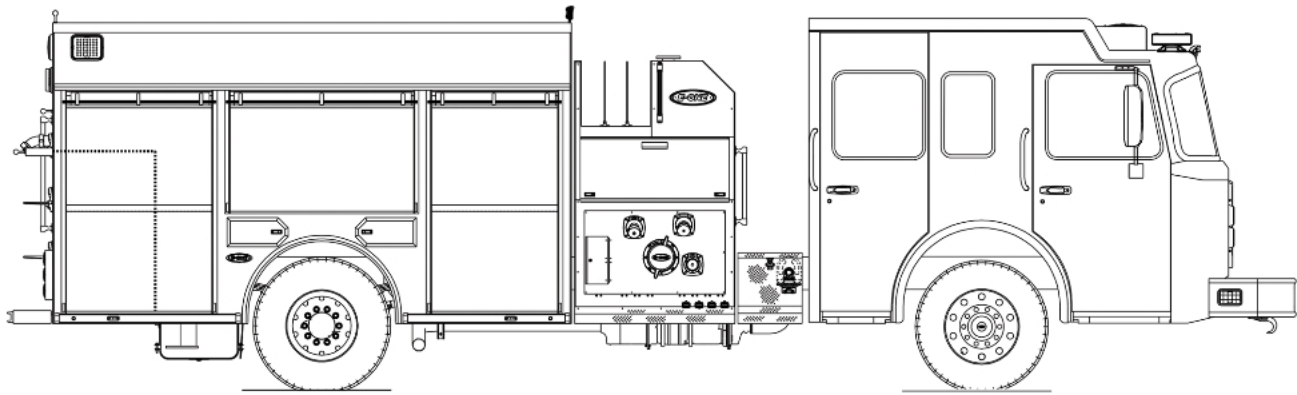

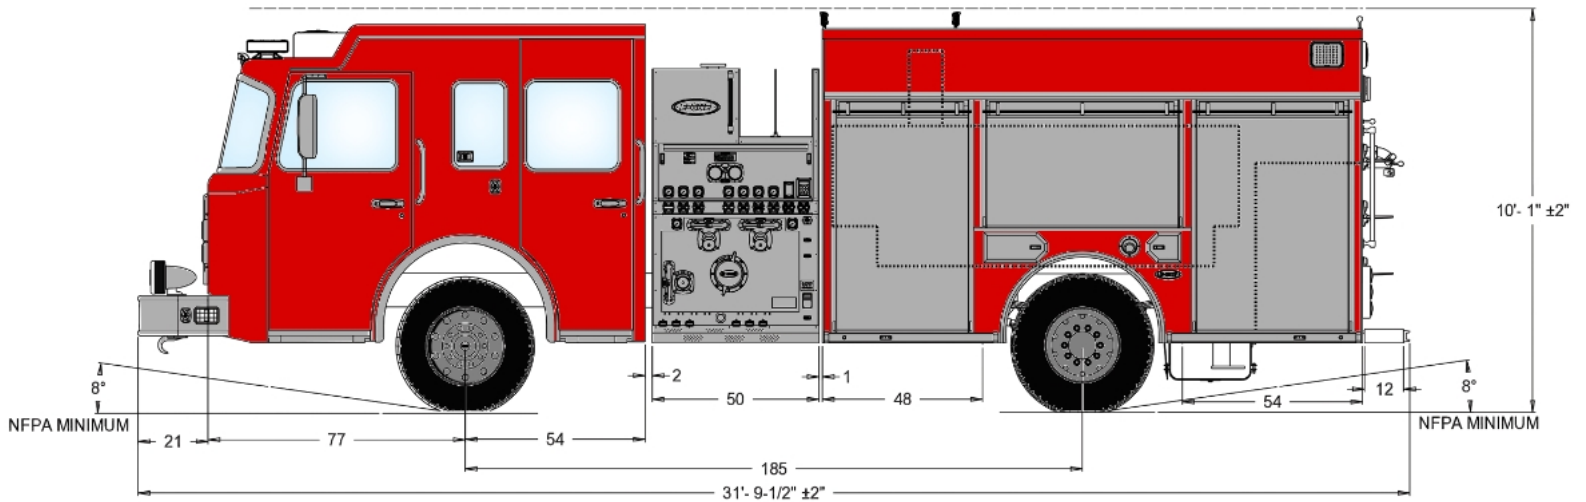

SIDE MOUNT RESCUE PUMPER MODEL AFT5003

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
Rear axle: 27,000 lbs.
- 185" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display






PUMP AND PLUMBING


- Hale QMAX 1500 gpm pump
- Side mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 750 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (2) 2.5" Rear Discharges
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake

BODY

- Stainless steel body
- Fiberglass Reinforced Panel (FRP) paint process
- ROM roll-up doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- RH Enclosed storage for 2 (10') hard suction hoses
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



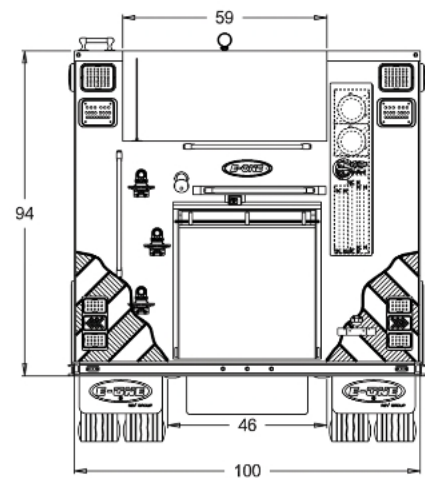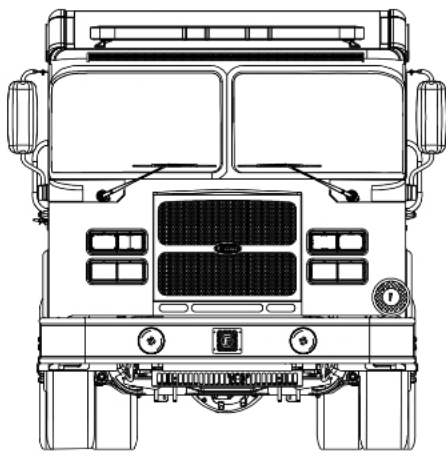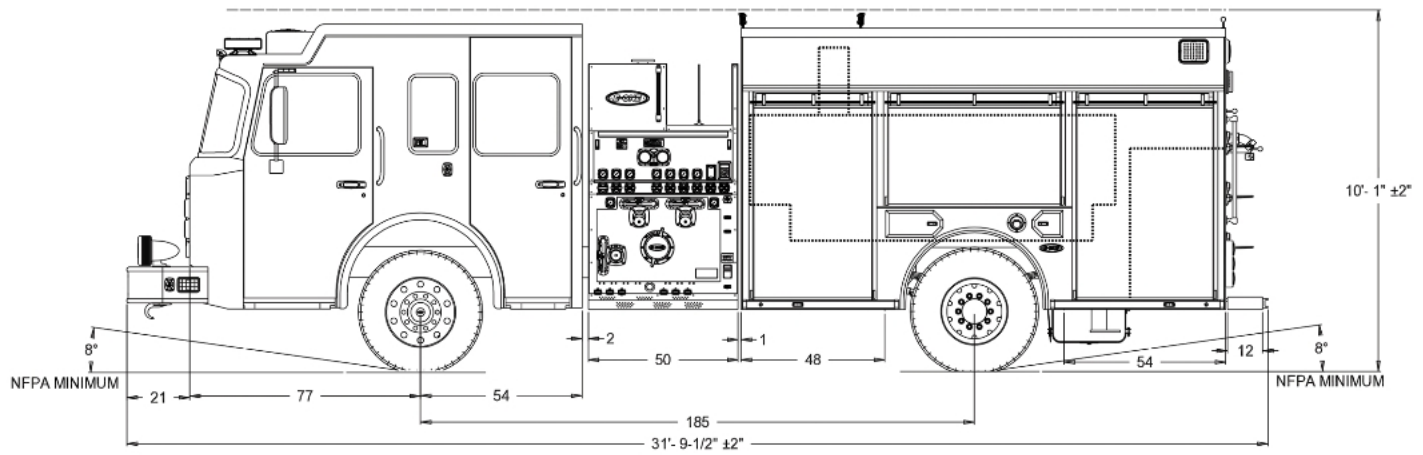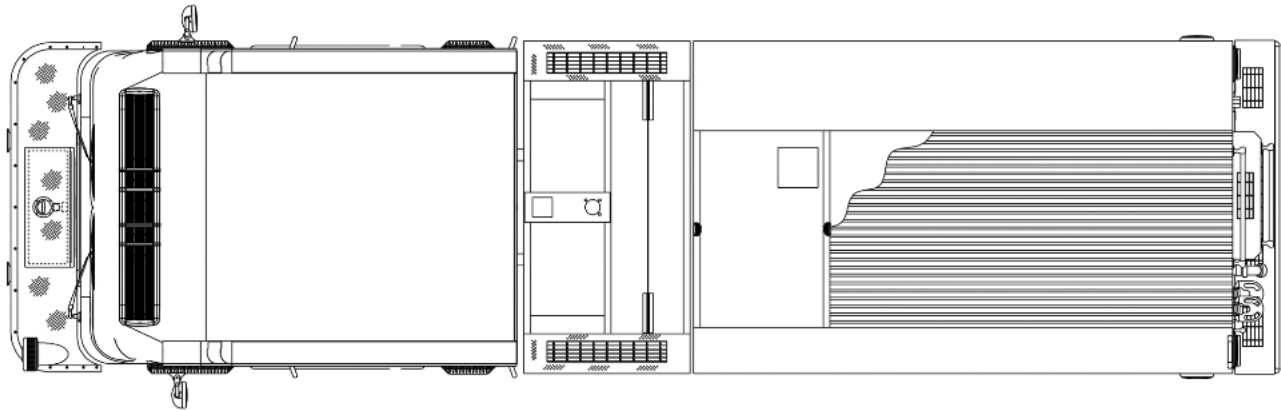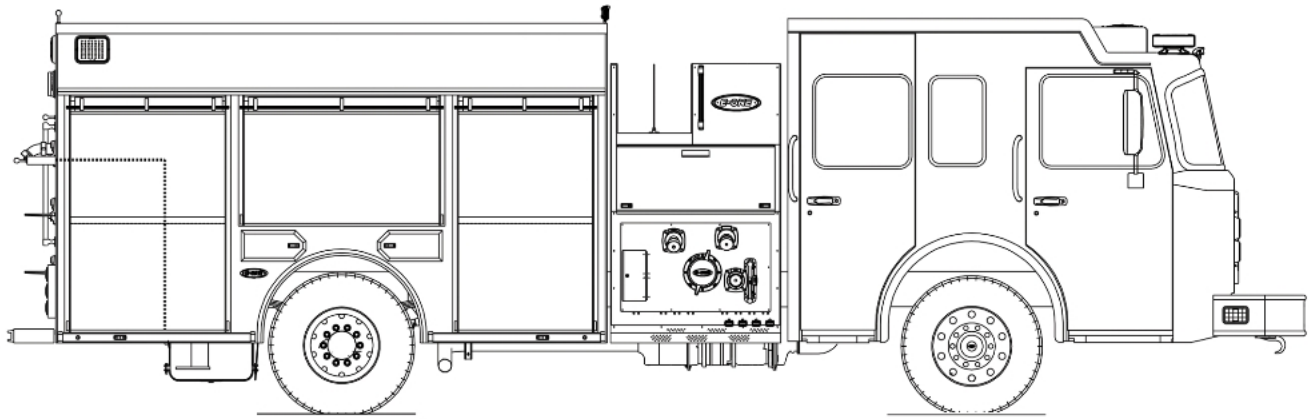

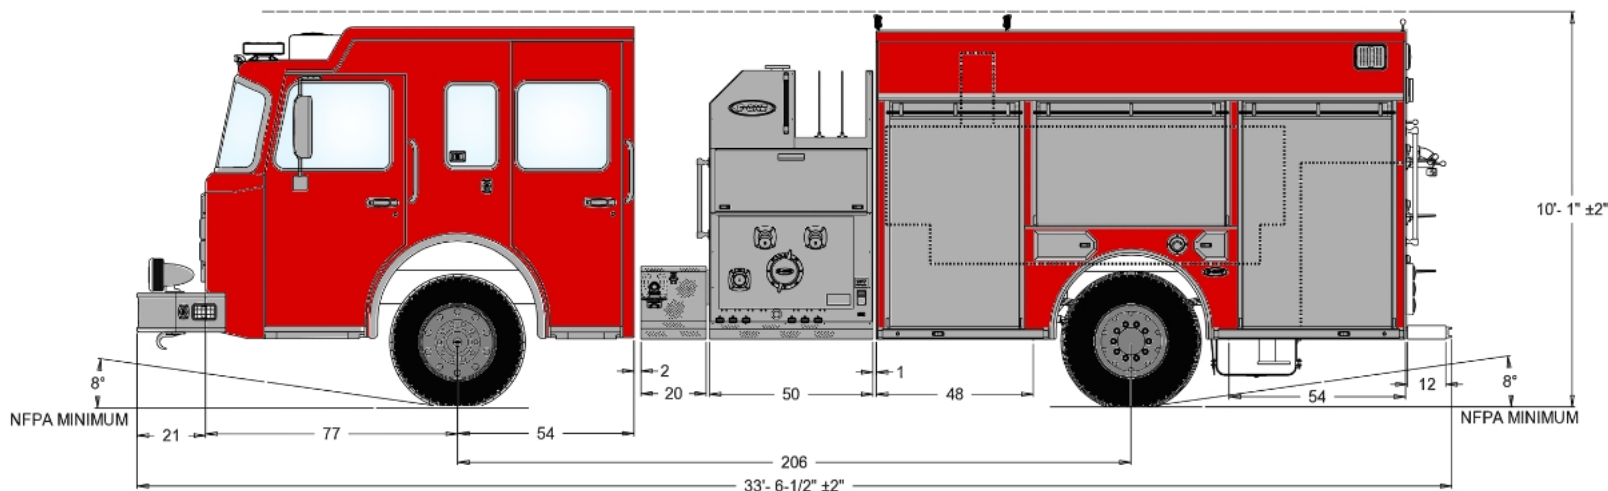

TOP MOUNT RESCUE PUMPER MODEL AFT5004

CHASSIS

- 54" MFD cab with 10" raised roof
- Seating capacity: Up to 6
- Cummins L9 450 HP engine
- Allison EVS 3000 transmission
- 50 or 68 Gallon Fuel Tank
- Front axle: 20,000 lbs.
Rear axle: 27,000 lbs.
- 206" Wheelbase
- Galvanized frame rails
- 21" Bumper extension with hose tray
- Weldon VMUX electrical system with Vista display
- Engine tunnel or Overhead AC
- 320 amp Leece Neville alternator
- (6) Harris BCI 31 batteries
- Whelen Freedom IV or Federal Navigator lightbar
- Whelen or Federal LED warning lights
- Whelen or Firetech scene lights
- Rear camera with in cab display

PUMP AND PLUMBING

- Hale QMAX 1500 gpm pump
- Top mount pump module with dunnage pan
- Class 1 TPG pressure governor
- 750 gallon water tank
- 30 gallon integral foam cell
- Hale Smartfoam 2.1
- (2) 1.5" Crosslay Preconnects
- (1) 2.5" Crosslay Preconnect
- (1) 1.5" Bumper Discharge
- (3) 2.5" Panel Discharges
- (1) 3.0" Panel Discharge
- (2) 2.5" Rear Discharges
- (1) 3" Deck gun Discharge
- (2) 2.5" Auxiliary intakes
- (1) 5.0" Front Intake
- (1) Booster reel in B1
- (1) 2.5" Rear direct tank fill

BODY

- Stainless steel body
- Fiberglass Reinforced Panel (FRP) paint process
- ROM roll-up doors
- Wheel well storage for (7) SCBA bottles
- RH Enclosed storage tunnel for 24'/14'/10' ladders and 2(10') pike poles
- RH Enclosed storage for 2 (10') hard suction hoses
- Whelen or Federal LED warning lights
- LED Compartment strip lighting
- LED Ground and Step lighting
- Whelen or Firetech scene lights



